

Title: Mobilift CX Boarding and Disembarking Dimensions

Creation Date: 13-03-2025


Ver. History: 01

Summary: This document summarizes the space requirements and other technical info pertaining to boarding disembarking the Mobilift CX (standard configuration)

Note: The Mobilift can be customized with numerous upgrades, which may affect the information presented here. Please check with your DLA sales representative if you have questions.


File: DLA Mobilift CX Boarding and Disembarking Specifications - 13-03-2025 R01.docx

Critical Dimensions for Storage and Travel

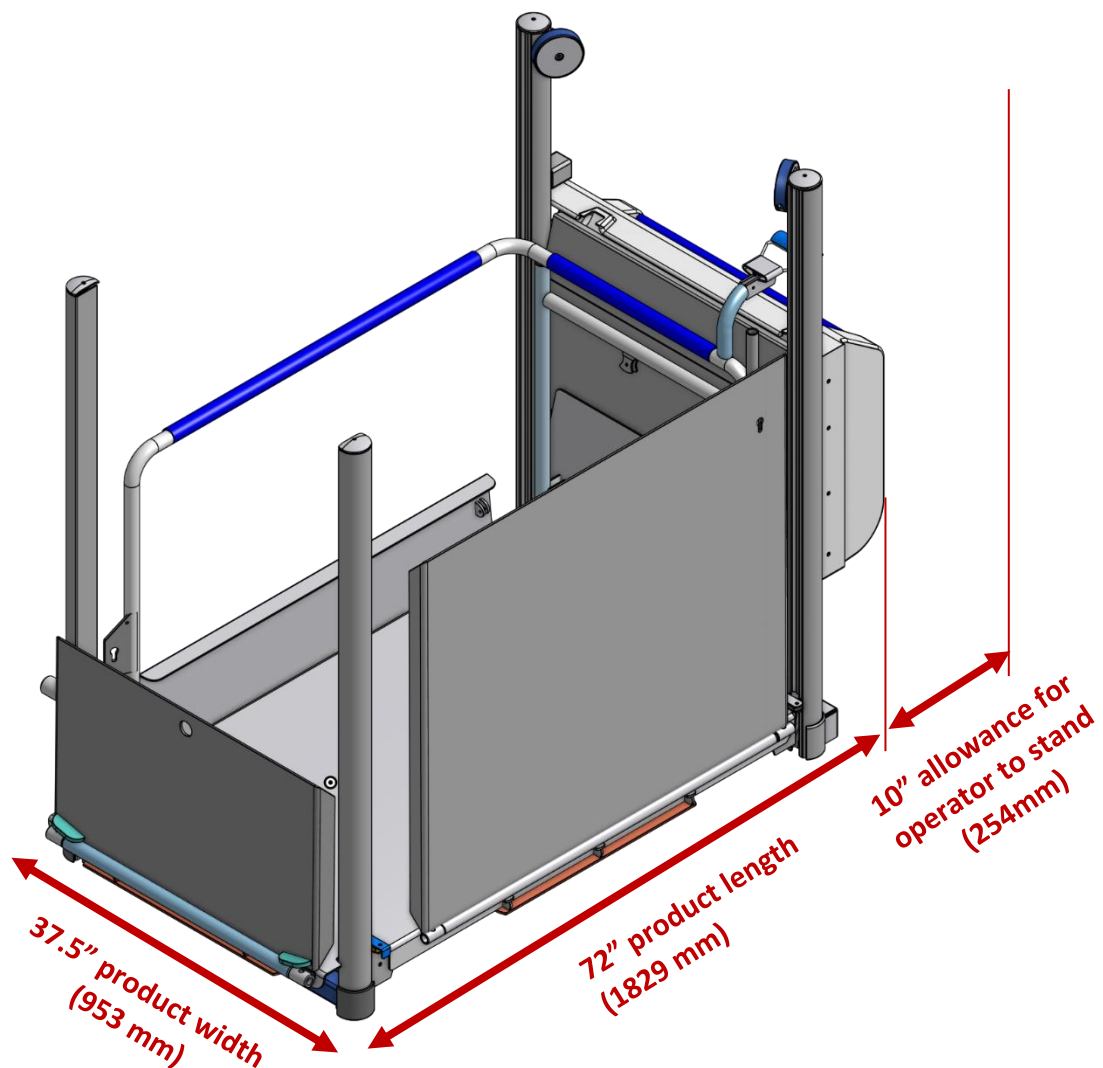

Note: Storage, travel & deployment width increases to 41" with extended reach bridge ramp (1041 mm)

Critical Dimensions for Boarding on Ground / Side Ramp

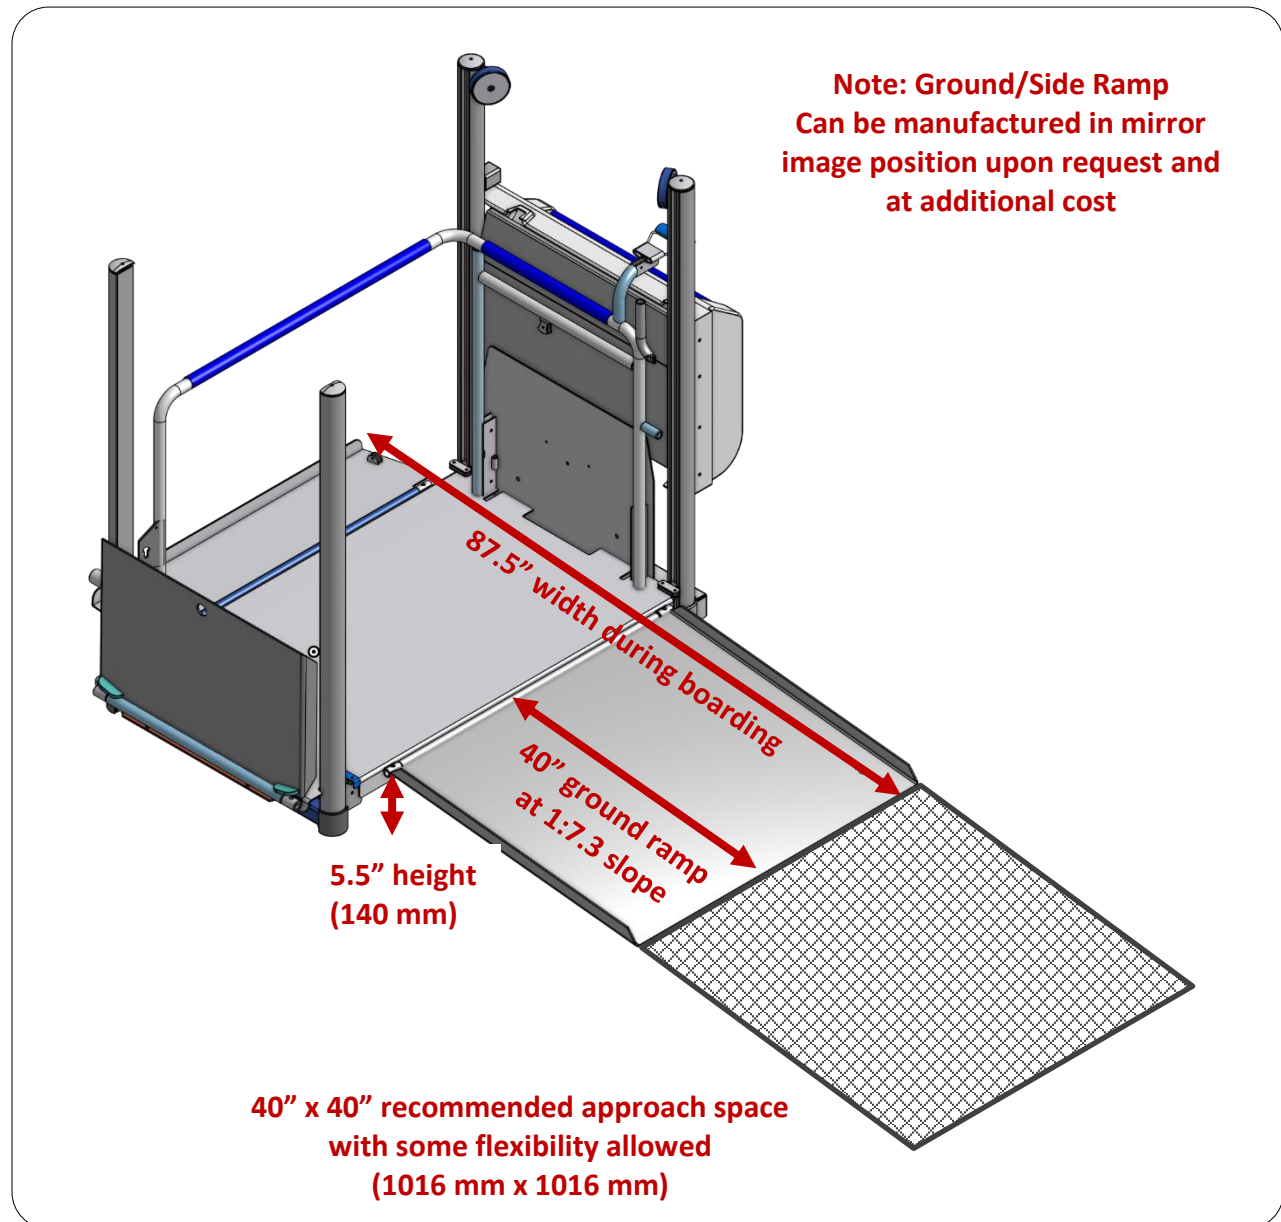

Critical Dimensions for Boarding on Bridge/End Ramp

Note: Bridge ramps up to 66" long with or without handrails are available upon request and at additional cost (1676 mm)

